


# FLUORESCENT MIRROR LOUVER TYPE

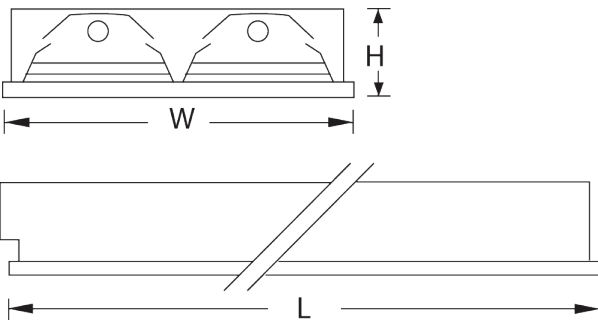

HOUSING	:HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES
SURFACE TREATMENT	:ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT
REFLECTOR	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87%
(OPTIONAL REF 95%)	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 95%
FRAME	:WHITE ENAMEL STEEL FRAME
WIRES	:THW, TIS.11-1988 STANDARD
LAMP HOLDER	:ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
PROTECTION CLASS	:PROTECTION CLASS EQUIVALENT TO IP 20
INSTALLATION	:RECESS T-BAR CEILING, RECESS CONCEAL CEILING (M-BAR)
APPLICATION	:OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE UNIVERSITY, GOVERNMENTAL BUILDING, SHOP ETC.
COMPLETE SET*	:T8 LAMP

MODEL	LAMP	DIMENSION(mm.)			CUT OUT(mm.)	
		L	W	H	L	W
HI-F TM-240B	2x36W T8	1195	595	100	1180	580

NOTE.....
.....
.....
.....
.....

INSTALLATION : RECESS T-BAR CEILING, RECESS CONCEAL CEILING (M-BAR)

