


FLUORESCENT MIRROR LOUVER TYPE



HOUSING	:HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES
SURFACE TREATMENT	:ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT
REFLECTOR	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87%
(OPTIONAL REF 95%)	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 95%
FRAME	:WHITE ENAMEL STEEL FRAME
WIRES	:THW, TIS.11-1988 STANDARD
LAMP HOLDER	:(HI-F LAR-XXX) ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD :(HI-F LAS-XXX) SPRING LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
PROTECTION CLASS	:PROTECTION CLASS EQUIVALENT TO IP 20
INSTALLATION	:SURFACE OR SUSPEND MOUNT
APPLICATION	:OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE UNIVERSITY, GOVERNMENTAL BUILDING, SHOP ETC.
COMPLETE SET*	:T8 LAMP, T5 LAMP

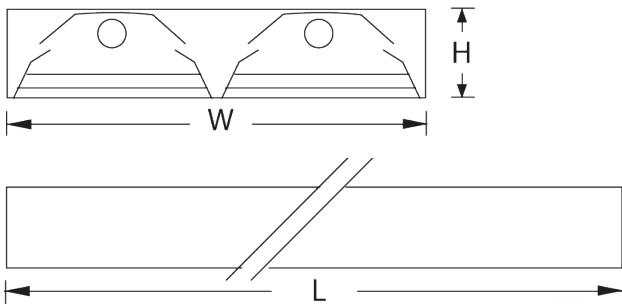

MODEL	LAMP	DIMENSION(mm.)			CUT OUT(mm.)	
		L	W	H	L	W
HI-F LAR-240B	2x36W T8	1225	600	95	-	-
HI-F LAR-228B	2x28W T5	1170	600	70	-	-
HI-F LAR-254B	2x54W T5	1170	600	70	-	-

NOTE.....
.....
.....
.....

INSTALLATION : SURFACE OR SUSPEND MOUNTED